Noise Monitoring Assessment

Dargues Gold Mine Majors Creek, NSW. 3 March 2021 - 4 March 2021



Prepared for: Aurelia Metals Ltd March 2021 MAC201092-01RP5

Document Information

Noise Monitoring Assessment

Dargues Gold Mine, Majors Creek, NSW

3 March 2021 – 4 March 2021

Prepared for: Aurelia Metals Ltd Dargues Gold Mine 920 Majors Creek Road Majors Creek NSW 2622

Prepared by: Muller Acoustic Consulting Pty Ltd PO Box 262, Newcastle NSW 2300 ABN: 36 602 225 132 P: +61 2 4920 1833 www.mulleracoustic.com

Document ID	Status	Date	Prepared By	Signed	Reviewed By	Signed
MAC201092-01RP5	Final	24 March 2021	Nicholas Shipman	N.Shp	Oliver Muller	al

DISCLAIMER

All documents produced by Muller Acoustic Consulting Pty Ltd (MAC) are prepared for a particular client's requirements and are based on a specific scope, circumstances and limitations derived between MAC and the client. Information and/or report(s) prepared by MAC may not be suitable for uses other than the original intended objective. No parties other than the client should use or reproduce any information and/or report(s) without obtaining permission from MAC. Any information and/or documents prepared by MAC is not to be reproduced, presented or reviewed except in full.



CONTENTS

1	II	NTROE	UCTION	5
2	Ν	IOISE (CRITERIA	7
	2.1	OPE	RATIONAL NOISE CRITERIA	7
	2.2	ROA	D NOISE CRITERIA	9
3	Ν	IETHO	DOLOGY	. 11
	3.1	OPE	RATOR ATTENDED NOISE MEASUREMENT METHODOLOGY	. 11
	3.2	UNA	TTENDED OPERATIONAL AND ROAD NOISE ASSESSMENT METHODOLOGY	. 12
4	F	RESULT	S	. 15
	4.1	ASSI	ESSMENT RESULTS – LOCATION R20	. 15
	4.2	ASSI	ESSMENT RESULTS – LOCATION R27	. 16
	4.3	ASSI	ESSMENT RESULTS – LOCATION R29	. 17
	4.4	ASSI	ESSMENT RESULTS – LOCATION R34	. 18
	4.5	ASSI	ESSMENT RESULTS – LOCATION R108	. 19
	4.6	UNA	TTENDED ROAD TRAFFIC NOISE RESULTS – LOCATION R34	. 20
5	C	SCUS	SION	. 21
	5.1	OPE	RATOR ATTENDED NOISE DISCUSSION	. 21
	5	.1.1	DISCUSSION OF RESULTS – LOCATION R20	. 21
	5	.1.2	DISCUSSION OF RESULTS – LOCATION R27	. 21
	5	.1.3	DISCUSSION OF RESULTS – LOCATION R29	. 21
	5	.1.4	DISCUSSION OF RESULTS – LOCATION R34	. 22
	5	.1.5	DISCUSSION OF RESULTS – LOCATION R108	. 22
6	C	CONCL	USION	. 23
A	PPEN	DIX A -	- GLOSSARY OF TERMS	

APPENDIX B – UNATTENDED NOISE MONITORING CHARTS



This page has been intentionally left blank



1 Introduction

Muller Acoustic Consulting Pty Ltd (MAC) has been commissioned by Aurelia Metals Ltd to complete a quarterly Noise Monitoring Assessment (NMA) for Dargues Gold Mine, Majors Creek, NSW (the 'mine').

The monitoring has been conducted in accordance with Condition L2 of the Environmental Protection Licence (EPL) #20095, and in accordance with the site's Noise Management Plan (NMP) 20170123, at five representative monitoring locations. This assessment has been undertaken during Quarter 1 on Wednesday 3 March 2021 and Thursday 4 March 2021 and forms part of the noise monitoring program to address relevant conditions.

The assessment has been conducted in accordance with the following documents:

- NSW Environment Protection Authority (EPA), Noise Policy for Industry (NPI), 2017;
- NSW Environment Protection Authority (EPA), Environment Protection Licence EPL #20095 (EPL);
- Dargues Gold Mine Noise Management Plan (NMP) 20170123;
- Dargues Gold Mine Project Approval, 10_0054; and
- Australian Standard AS 1055:2018 Acoustics Description and measurement of environmental noise - General Procedures.

A glossary of terms, definitions and abbreviations used in this report is provided in Appendix A.



This page has been intentionally left blank



2 Noise Criteria

2.1 Operational Noise Criteria

Section L2 of the project's EPL (EPL #20095) outlines the applicable operational noise criteria for all privately owned residential receivers surrounding the mine. The criteria outlined in the EPL is reproduced below:

L2.1 Noise from the premises must not exceed the sound pressure level (noise) limits presented in the Table below. Note that the limits apply to the operation of the project and represent the sound pressure level (noise) contribution, at the nominated receiver locations in the table.

 Table 1 summaries the applicable noise criteria at the three monitoring locations in accordance with the sites EPL and NMP.

Table 1 Noise Monitoring Program							
	Nois	Noise Criteria, dB LA1(1min)					
Monitoring Location	Day	Evening	Night	Night			
	(7am to 6pm)	(6pm to 10pm)	(10pm to 7am)	(10pm to 7am)			
At any residence	35	35	35	45			
Majors Creek State							
Conservation Area	35	35	35	45			
(when in use by any	35		33	40			
person)							

L2.2 For the purpose of Noise Limit Conditions above:

'Day' is defined as the period from 7am to 6pm Monday to Saturday and 8am to 6pm Sunday and Public Holidays;

'Evening' is defined as the period from 6pm to 10pm on any day; and

'Night' is defined as the period from 10pm to 7am Monday to Saturday and 10pm to 8am Sunday and Public Holidays.

L2.3 The noise emission limits identified in the table above apply under meteorological conditions of:

a) Wind speeds up to 3 m/s at 10m above ground level; or

b) temperature inversion conditions of up to 3 °C/100m and wind speeds up to 2 m/s at 10m above ground level

L2.4 For the purpose of the Condition L4.3:

a) The meteorological data to be used for determining meteorological conditions is the data recorded by the meteorological weather station established at the premises for the purposes of this Environment Protection Licence ("Point 59" as outlined in Weather Monitoring conditions below)



b) Stability category temperature inversion conditions are to be determined by the sigma-theta method referred to in Part E4 of Appendix E to the New South Wales Industrial Noise Policy (EPA 2000).

L2.5 Determining Compliance

To determine compliance:

a) with the Leq(15 minute) noise limits in the Noise Limits table, the noise measurement equipment must be located:

i) approximately on the property boundary, where any dwelling is situated 30 meters or less from the property boundary closest to the premises; or

ii) within 30 meters of a dwelling façade, but not closer than 3m, where any dwelling on the property is situated more than 30 meters from the property boundary closest to the premises; or, where applicable

iii) within approximately 50 meters of the boundary of a National Park, Nature Reserve or State Conservation Area.

b) with the LA1(1 minute) noise limits in the Noise Limits table, the noise measurement equipment must be located within 1 meter of a dwelling façade.

c) with the noise limits in the Noise Limits table, the noise measurement equipment must be located:

i) at the most affected point at a location where there is no dwelling at the location; or

ii) at the most affected point within an area at a location prescribed by part (a) or part (b) of this condition.

L2.6 For the purposes of determining the noise generated at the premises the modification factors in Section 4 of the NSW Industrial Noise Policy must be applied, as appropriate, to the noise levels measured by the noise monitoring equipment.

L2.7A breach of this license will still occur where noise generated from the premises in excess of the appropriate limit is measured: i) at a location other than an area prescribed in part (a) and part (b) of Condition L4.5; and/or ii) at a point other than the most affected point at a location.

MAC Technical Note: For sleep disturbance, the LA1(1 minute) descriptor is meant to represent a maximum noise level measured under 'fast' time response. DEC will accept analysis based on either LA1(1 minute) or LA(max).



2.2 Road Noise Criteria

Environmental Performance Condition 2 of the Project Approval (AN10_0054) specifies noise criteria for off-site traffic from the mine. The condition is reproduced below:

Condition 2 The Proponent shall take all reasonable and feasible measures to ensure that the traffic noise generated by the project does not exceed the traffic noise impact assessment criteria in **Table 2**.

Table 2 Traffic Noise Impact Assessment Criteria dB(A)						
Road —	Assessment Criteria - dBA					
	Day (7am to 10pm)	Night (10pm to 7am)				
Majors Creek Road, Araluen Road, Captains	55dBA	50dBA				
Flat Road, Coghill Street and Wallace Street	LAeq(1hour)	LAeq(1hour)				

Note: The noise generated by the project is to be measured in accordance with the relevant procedures in the NSW Road Noise Policy.



This page has been intentionally left blank



3 Methodology

All attended noise surveys for this assessment were conducted in general accordance with the procedures described in Australian Standard AS 1055:2018, "Acoustics - Description and Measurement of Environmental Noise" and the EPL.

The acoustic instrumentation used carries current NATA calibration and complies with AS IEC 61672.1-2019-Electroacoustics - Sound level meters - Specifications. Calibration of all instrumentation was checked prior to and following measurements. Drift in calibration did not exceed ±0.5dBA. All equipment carried appropriate and current NATA (or manufacturer) calibration certificates.

3.1 Operator Attended Noise Measurement Methodology

The locality surrounding the mine is primarily rural/residential. Operator attended noise monitoring was undertaken at five representative receivers outlined in the mine's NMP and are presented in **Table 3**.

Table 3 Receiver Location ¹						
Monitoring Longtion	Resident Identifier	Coordinates (GDA94-MGA55)				
Monitoring Location	Resident identilier	Easting	Northing			
NM1	R29	748148	6061931			
NM2	R108	747454	6062651			
NM3	R20	748672	6061250			
NM5	R27	748998	6061467			
NM6	R34	751242	6064950			

Note 1: As per the Mine's NMP.

The receiver locations and unattended noise measurement location are presented in Figure 1.


Attended measurements were carried out using a Svantek Type 1, 971 noise analyser on Wednesday 3 March 2021 and Thursday 4 March 2021. Where possible throughout each survey the operator quantified the contribution of any significant noise sources.



3.2 Unattended Operational and Road Noise Assessment Methodology

Unattended road traffic noise monitoring was conducted on the boundary of 664 Majors Creek Road, Jembaicumbene, NSW (R34) using a Svantek Type 1, 977 noise analyser between Wednesday 3 March 2021 and Thursday 4 March 2021. Noise levels obtained at the monitoring location are considered representative of 664 Majors Creek Road, Jembaicumbene, NSW.



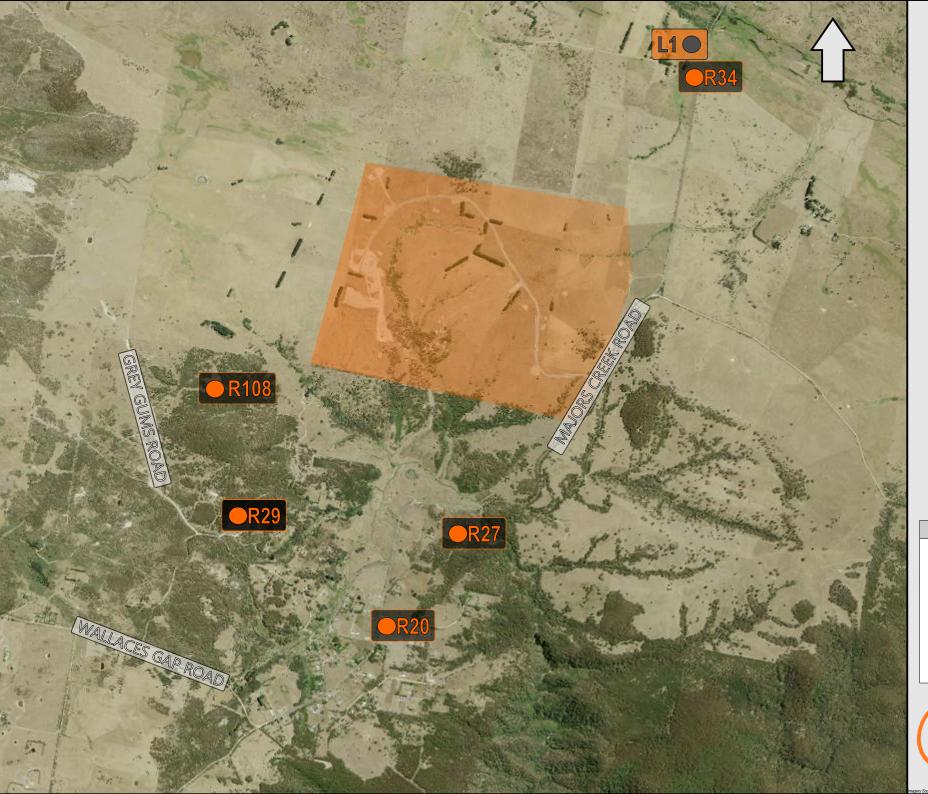





This page has been intentionally left blank



4 Results

4.1 Assessment Results – Location R20

The results of the attended noise measurements at location R20 for the March 2021 survey are summarised in **Table 4** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

	T:	Descrip	tor (dBA re	e 20 µPa)	EPL	Mata and a	
Date	Time (hrs)	LAmax	LAeq	LA90	Limit	Meteorology ¹	Description and SPL, dBA
03/03/2021 (Day)	15:17	75	55	45	35	WD: S WS: 0.1m/s Rain: Nil	Agricultural 41-54 Birds 41-46 Traffic 41-75 Dargues Inaudible
	Darç	gues Site L	Aeq(15min)	Contributio	on		<30
	D	argues Sit	e LAmax Co	ontribution			<35
03/03/2021 (Evening)	20:08	85	60	26	35	WD: S WS: 0.1m/s Rain: Nil	Birds 27-63 Traffic 27-85 Insects 27-29 Local residential noise 27-36
	Dar	nuos Sito I	Acg(1Emin)	Aeq(15min) Contributic			Dargues Inaudible <35
			e LAmax Co		лт —		<35
04/03/2021 (Night)	05:50	81	58	27	35	WD: W WS: 0.1m/s Rain: Nil	Traffic 21-81 Birds 21-28 Dargues processing 21-24
	Darç	gues Site L	Aeq(15min)	Contributio	on		22
	D	24					



4.2 Assessment Results – Location R27

The results of the attended noise measurements at location R27 for the March 2021 survey are summarised in **Table 5** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

Table 5 Ope	erator-Atten	ded Nois	e Survey	Results -	Locatio	on R27	
Date	Time (hrs)	Descrip	tor (dBA re	e 20 µPa)	EPL	Meteorology ¹	Description and SPL, dBA
Date	Time (Tits)	LAmax	LAeq	LA90	Limit	Meteorology	Description and SFE, dBA
03/03/2021 (Day)	14:52	49	35	31	35	WD: S WS: 0.2m/s Rain: Nil	Insects 29-32 Traffic 31-49 Birds 31-36 Dargues Inaudible
	Darç	gues Site L	Aeq(15min)	Contributio	on		<30
	Da	argues Site	e LAmax C	ontribution			<35
03/03/2021 (Evening)	20:27	52	41	39	35	WD: S WS: 0.1m/s Rain: Nil	Insects 39-41 Traffic 40-52 Dargues Inaudible
	Darg	gues Site L	Aeq(15min)	Contributio	on		<30
	D	argues Sit	e LAmax C	ontribution			<35
04/03/2021 (Night)	05:30	56	39	28	35	WD: W WS: 0.1m/s Rain: Nil	Insects <26 Traffic 26-56 Dargues haul truck 31-44 (one minute) Dargues processing 26-33
	Darg	gues Site L	Aeq(15min)	Contributio	on		29
	D	44					



4.3 Assessment Results – Location R29

The results of the attended noise measurements at location R29 for the March 2021 survey are summarised in **Table 6** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

	T:	Descriptor (dBA re 20 µPa)			EPL	Mata	
Date	Time (hrs)	LAmax	LAeq	LA90	Limit	Meteorology ¹	Description and SPL, dBA
						WD: S	Wind in trees 34-54
03/03/2021	17:37	54	40	33	35	WD: 3 WS: 2.5m/s	Birds 33-42
(Day)	17.57	54	40	55	35	Rain: Nil	Traffic <32
						INdill. INII	Dargues Inaudible
	Darg	gues Site I	Aeq(15min)	Contributio	on		<30
	D	argues Sit	e LAmax C	ontribution			<35
							Birds 28-59
03/03/2021		59 3		28	3 35	WD: S	Insects 27-29
(Evening)	19:45		37			WS: 0.4m/s	Agricultural 29-35
(Lvening)						Rain: Nil	Dogs 23-36
							Dargues Inaudible
	Dar	gues Site l	_Aeq(15min)	Contributio	on		<30
	D	argues Sit	e LAmax C	ontribution			<35
							Birds 17-57
04/03/2021	00.15	F7	07	10	05	WD: W	Dogs 24-30
(Night)	06:15	57	37	19	35	WS: 0.1m/s	Traffic 24-28
						Rain: Nil	Dargues Inaudible
	Dar	gues Site l	Aeq(15min)	Contributio	on		<30
	<35						



4.4 Assessment Results – Location R34

The results of the attended noise measurements at location R34 for the March 2021 survey are summarised in **Table 7** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL	Meteorology ¹	Description and SPL, dBA
Dale	Time (Tits)	LAmax	LAeq	LA90	Limit	Meleorology	Description and SFE, dBA
							Traffic 35-83
03/03/2021						WD: S	Insects <35
	14:21	83	58	32	35	WS: 0.3m/s	Birds 35-41
(Day)						Rain: Nil	Wind 35-42
							Dargues Inaudible
	Dar	gues Site l	Aeq(15min)	Contributio	n		<30
	D	argues Sit	e LAmax C	ontribution			<35
		20:49 74 47			35	WD: S	Insects 18-21
03/03/2021	20:40		47	20		WD. S WS: 0.1m/s	Livestock 21-26
(Evening)	20.49		41			Rain: Nil	Traffic 21-73
						Raill. INII	Dargues Inaudible
	Dar	gues Site l	Aeq(15min)	Contributio	n		<30
	D	argues Sit	e LAmax C	ontribution			<35
						WD: S	Birds 13-47
04/03/2021	05:07	78	51	14	35	-	Livestock 18-21
(Night)	05.07	10	IC	14	30	WS: 0.1m/s	Traffic 17-76
						Rain: Nil	Dargues Inaudible
	Dar	gues Site l	Aeq(15min)	Contributio	on		<30
	<35						



4.5 Assessment Results – Location R108

The results of the attended noise measurements at location R108 for the March 2021 survey are summarised in **Table 8** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

Table 8 Op	erator-Atten	ded Nois	e Survey	Results –	Locatio	on R108	
Date	Time (hrs)	Descrip	tor (dBA re	e 20 µPa)	EPL	Meteorology ¹	Description and SPL, dBA
Date	Time (fills)	LAmax	LAeq	LA90	Limit	weteorology	Description and SFL, dBA
							Insects 31-34
04/03/2021						WD: S	Birds 31-57
(Day)	07:00	57	37	24	35	WS: 0.6m/s	Dogs 31-34
(Day)						Rain: Nil	Wind in trees <35
							Dargues tipping 33-36
	Dar	gues Site L	_Aeq(15min)) Contributio	on		26
	D	argues Sit	e LAmax C	ontribution			36
		18:12 67				WD: S	Birds 31-67
03/03/2021	10.10		42 27	25	WD: 3 WS: 1.8m/s	Insects 31-33	
(Evening)	10.12		42	42 21	35	Rain: Nil	Wind in trees 31-44
							Dargues Inaudible
	Dar	gues Site L	Aeq(15min)) Contributio	on		<30
	D	argues Sit	e LAmax C	ontribution			<35
04/03/2021						WD: S	Birds 28-56
	06:36	56	37	25	35	WS: 0.5m/s	Insects 26-28
(Night)						Rain: Nil	Dargues Inaudible
	Dar	gues Site L	Aeq(15min)) Contributio	on		<30
	D	<35					



4.6 Unattended Road Traffic Noise Results – Location R34

To assess road traffic noise levels associated with mine vehicles, an unattended noise monitor was located on the boundary of 664 Majors Creek Road, Jembaicumbene (R34).

The results of the road traffic noise measurements on Wednesday 3 March 2021 and Thursday 4 March 2021 are summarised in **Table 9**.

As per Section 3(2) of Dargues Gold Mine's Noise Management Plan, results of the road traffic noise measurements identify that noise levels were influenced by extraneous noise sources such as birds and local road traffic not associated with the mine. The noise contribution of mine related traffic at this location remained below the relevant criteria.

able 9 Road Noise Survey Re	sults						
	Overall Measured dB LAeq	Compliance Limit					
Operational Period	(dBA re 20 µPa)	dB LAeq(1hr)					
Ass	essment Period – Day (7am to 10pm), dB LA	Aeq(1hr)					
7:00am to 6:00pm	61	55					
Asse	Assessment Period – Night (10pm to 7am), dB LAeq(1hr)						
6:00am to 7:00am	56	50					



5 Discussion

5.1 Operator Attended Noise Discussion

5.1.1 Discussion of Results – Location R20

Operator attended measurement results at R20, on Wednesday 3 March 2021 and Thursday 4 March 2021 identified that mine noise was audible only during the night period (ie shoulder) measurement, although satisfied criteria. Generally, agriculture, birds, traffic, insects, and local residential noise were audible sources throughout all three monitoring periods.

Therefore, noise contribution from the mine satisfied the relevant noise criteria for the attended measurements on Wednesday 3 March 2021 and Thursday 4 March 2021.

5.1.2 Discussion of Results – Location R27

Operator attended measurement results at R27, on Wednesday 3 March 2021 and Thursday 4 March 2021 identified that mine noise was audible during the night period (ie shoulder), although satisfied criteria. Generally, insects, traffic, and birds were audible sources throughout all three monitoring periods.

In summary the noise contribution from the mine satisfied the relevant noise criteria for the attended measurements on Wednesday 3 March 2021 and Thursday 4 March 2021.

5.1.3 Discussion of Results – Location R29

Operator attended measurement results at R29, on Wednesday 3 March 2021 and Thursday 4 March 2021identified that mine noise was inaudible during the day, evening, and night periods (ie shoulder), and satisfied criteria. Generally, wind in trees, birds, traffic, insects, agriculture, and dogs barking were audible sources throughout all three monitoring periods.

The noise contribution from the mine satisfied the relevant noise criteria for the attended measurements on Wednesday 3 March 2021 and Thursday 4 March 2021.



5.1.4 Discussion of Results – Location R34

Operator attended measurement results at R34, Wednesday 3 March 2021 and Thursday 4 March 2021 identified that mine noise was inaudible during the day, evening, and night period (ie shoulder), and satisfied criteria. Generally, traffic, insects, birds, wind, and livestock were audible sources throughout all three monitoring periods.

Therefore, noise contribution from the mine satisfied the relevant noise criteria for the attended measurements on Wednesday 3 March 2021 and Thursday 4 March 2021.

5.1.5 Discussion of Results – Location R108

Operator attended measurement results at R108, Wednesday 3 March 2021 and Thursday 4 March 2021 identified that mine noise was audible during the day period, although satisfied criteria. Generally, insects, birds, dogs barking, and wind in trees were audible sources throughout all three monitoring periods.

In summary, the noise contribution from the mine satisfied the relevant noise criteria for the attended measurements Wednesday 3 March 2021 and Thursday 4 March 2021.



6 Conclusion

Muller Acoustic Consulting Pty Ltd (MAC) has completed a Noise Monitoring Assessment (NMA) on behalf of Aurelia Metals Ltd at Dargues Gold Mine, Majors Creek, NSW. The assessment was completed to quantify site noise emissions against relevant noise criteria pertaining to mine operations and offsite traffic noise emissions during Quarter 1, 2021.

Attended monitoring on Wednesday 3 March 2021 and Thursday 4 March 2021has identified that operational noise emissions generated by the mine comply with relevant LAeq(15min) and LAmax noise limits at all assessed receivers.

Road traffic noise levels were influenced by extraneous noise sources such as birds and local road traffic not associated with the mine. Notwithstanding, mine road traffic noise levels remained below relevant road noise criteria.



This page has been intentionally left blank



Appendix A – Glossary of Terms



 Table A1 provides a number of technical terms have been used in this report.


Term	Description
1/3 Octave	Single octave bands divided into three parts
Octave	A division of the frequency range into bands, the upper frequency limit of each band being twice
	the lower frequency limit.
ABL	Assessment Background Level (ABL) is defined in the NPI as a single figure background level for
	each assessment period (day, evening and night). It is the tenth percentile of the measured LA90
	statistical noise levels.
Adverse Weather	Weather effects that enhance noise (that is, wind and temperature inversions) that occur at a site
	for a significant period of time (that is, wind occurring more than 30% of the time in any
	assessment period in any season and/or temperature inversions occurring more than 30% of the
	nights in winter).
Ambient Noise	The noise associated with a given environment. Typically a composite of sounds from many
	sources located both near and far where no particular sound is dominant.
A Weighting	A standard weighting of the audible frequencies designed to reflect the response of the human
	ear to noise.
dBA	Noise is measured in units called decibels (dB). There are several scales for describing noise, the
	most common being the 'A-weighted' scale. This attempts to closely approximate the frequency
	response of the human ear.
dB(Z), dB(L)	Decibels Linear or decibels Z-weighted.
Hertz (Hz)	The measure of frequency of sound wave oscillations per second - 1 oscillation per second
	equals 1 hertz.
LA10	A noise level which is exceeded 10 % of the time. It is approximately equivalent to the average of
	maximum noise levels.
LA90	Commonly referred to as the background noise, this is the level exceeded 90 % of the time.
LAeq	The summation of noise over a selected period of time. It is the energy average noise from a
	source, and is the equivalent continuous sound pressure level over a given period.
LAmax	The maximum root mean squared (rms) sound pressure level received at the microphone during a
	measuring interval.
RBL	The Rating Background Level (RBL) is an overall single figure background level representing
	each assessment period over the whole monitoring period. The RBL is used to determine the
	intrusiveness criteria for noise assessment purposes and is the median of the ABL's.
Sound power level (LW)	This is a measure of the total power radiated by a source. The sound power of a source is a
	fundamental location of the source and is independent of the surrounding environment. Or a
	measure of the energy emitted from a source as sound and is given by :
	= 10.log10 (W/Wo)



Table A2 Common Noise Sources and Their Typical Sound Pressure Levels (SPL), dBA	
Source	Typical Sound Level
Threshold of pain	140
Jet engine	130
Hydraulic hammer	120
Chainsaw	110
Industrial workshop	100
Lawn-mower (operator position)	90
Heavy traffic (footpath)	80
Elevated speech	70
Typical conversation	60
Ambient suburban environment	40
Ambient rural environment	30
Bedroom (night with windows closed)	20
Threshold of hearing	0

 Table A2 provides a list of common noise sources and their typical sound level.



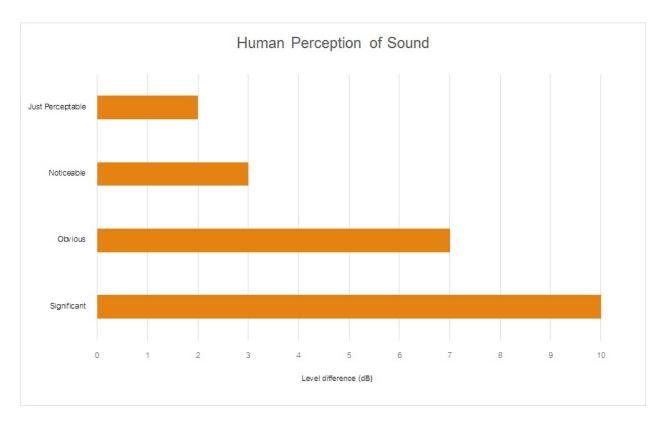



This page has been intentionally left blank




Appendix B – Unattended Noise Monitoring Charts





Background Noise Levels


664 Majors Creek Road, Jembaicumbene - Wednesday 3 March 2021

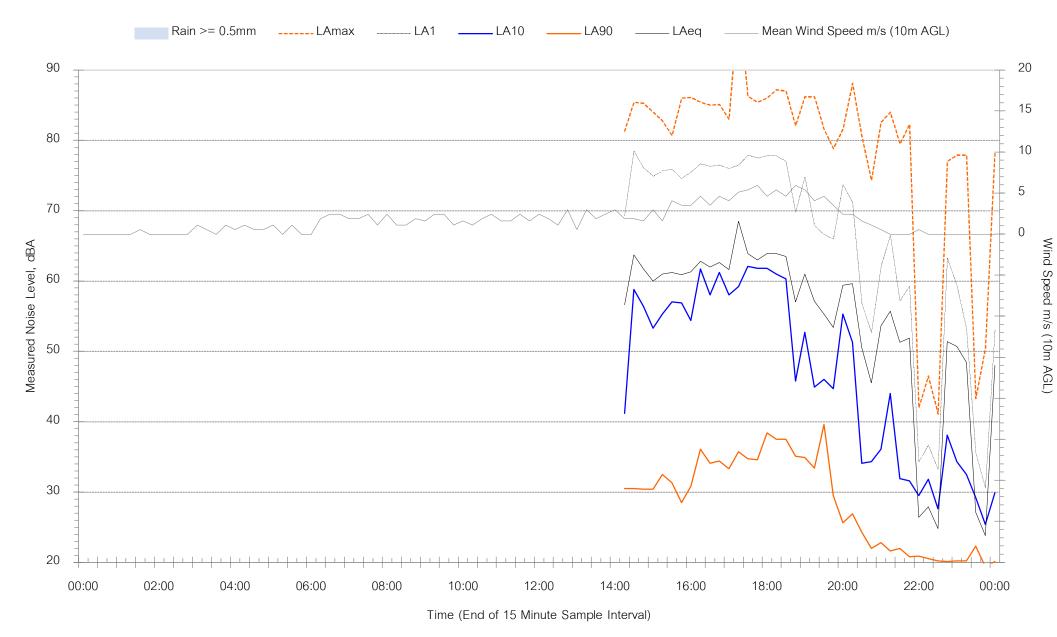



Background Noise Levels

664 Majors Creek Road, Jembaicumbene - Thursday 4 March 2021

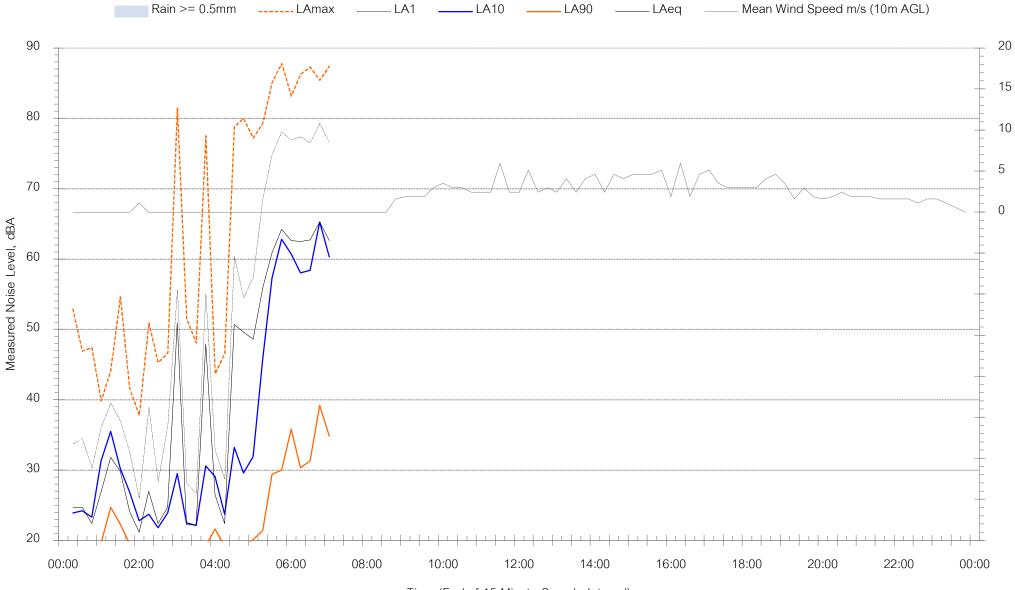

Wind Speed m/s (10m AGL)

Time (End of 15 Minute Sample Interval)

Muller Acoustic Consulting Pty Ltd PO Box 262, Newcastle NSW 2300 ABN: 36 602 225 132 P: +61 2 4920 1833 www.mulleracoustic.com

